



# CT2000 Series



|                       |                     |
|-----------------------|---------------------|
| <b>Capacity</b>       | 2000 lbs (CT2003FB) |
|                       | 1500 lbs (CT2004FB) |
| <b>Crane Rating</b>   | 6000 ft.lbs.        |
| <b>Boom Length(s)</b> | 3' - 5' (CT2003FB)  |
|                       | 4' - 7' (CT2004FB)  |
|                       |                     |
| <b>Min. GVWR</b>      | 1 Ton               |
| <b>Controls</b>       | 12V DC              |

## CT2003FB Specifications

|                           |                                                  |
|---------------------------|--------------------------------------------------|
| <b>Capacity</b>           | 2000 lbs                                         |
| <b>Crane Rating</b>       | 6000 ft.lbs.                                     |
| <b>Boom Length(s)</b>     | 3' - 5'                                          |
| <b>Stowed Boom Length</b> | 15" (Folded Down)                                |
| <b>Dimensions</b>         | 71-3/4" H x 15" W                                |
| <b>Base Plate</b>         | 10" x 10" (C Socket)<br>8" x 8" (A Socket)       |
| <b>Bolt Holes</b>         | 6-1/2" x 6-1/2" (C Socket)<br>7" x 7" (A Socket) |
| <b>Wire Rope</b>          | 35 ft. of 3/16"                                  |
| <b>Crane Weight</b>       | 240 lbs                                          |
| <b>Power</b>              | 12V DC High-Torque Winch                         |
| <b>Rotation</b>           | 8 Position Positive Pin Lock                     |
| <b>Extension</b>          | Pin Lock Boom Extension                          |
| <b>Cold Cranking Amps</b> | 350                                              |

## CT2004FB Specifications

|                           |                                                  |
|---------------------------|--------------------------------------------------|
| <b>Capacity</b>           | 1500 lbs                                         |
| <b>Crane Rating</b>       | 6000 ft.lbs.                                     |
| <b>Boom Length(s)</b>     | 4' - 7'                                          |
| <b>Stowed Boom Length</b> | 15" (Folded Down)                                |
| <b>Dimensions</b>         | 71-3/4" H x 15" W                                |
| <b>Base Plate</b>         | 10" x 10" (C Socket)<br>8" x 8" (A Socket)       |
| <b>Bolt Holes</b>         | 6-1/2" x 6-1/2" (C Socket)<br>7" x 7" (A Socket) |
| <b>Wire Rope</b>          | 35 ft. of 3/16"                                  |
| <b>Crane Weight</b>       | 260 lbs                                          |
| <b>Power</b>              | 12V DC High-Torque Winch                         |
| <b>Rotation</b>           | 8 Position Positive Pin Lock                     |
| <b>Extension</b>          | Pin Lock Boom Extension                          |
| <b>Cold Cranking Amps</b> | 350                                              |

## Standard Equipment

#2 Gauge x 5' Black Grounding Strip  
#2 Gauge x 5' Red +12V Battery Cable  
Master Disconnect Switch Kit  
#4 Gauge x 25' Battery Cable  
15 FT Plug-In Remote Control Pendant  
Standard "C" Socket

## Optional Equipment

Wireless Radio Remote  
250 AMP Circuit Breaker Kit  
"A" - Flush Mount Bracket  
"C" - Surface Mount Bracket  
Custom Mast Cut-Down Heights  
Custom Paint  
Jackleg for Utility Bodies  
Jackleg for Flatbed Bodies  
Short of Tall Mast Options




Venco Venturo Industries LLC  
12110 Best Place | Cincinnati, Ohio 45241  
800-226-2238 | 513-772-8448 Local  
info@venturo.com | [www.venturo.com](http://www.venturo.com)

NOTE: All Venturo service cranes meet ANSI B30.5 and OSHA 1910.180 specifications. Specifications subject to change without notice.  
Copyright © 2022 Venco Venturo Industries LLC. All Rights Reserved.



# CT2000 Series

**WARNING: THESE PRODUCTS ARE NOT PASSENGER LIFTS. THEY ARE NOT DESIGNED OR INTENDED TO BE USED TO LIFT, SUPPORT OR OTHERWISE TRANSPORT PERSONNEL.**

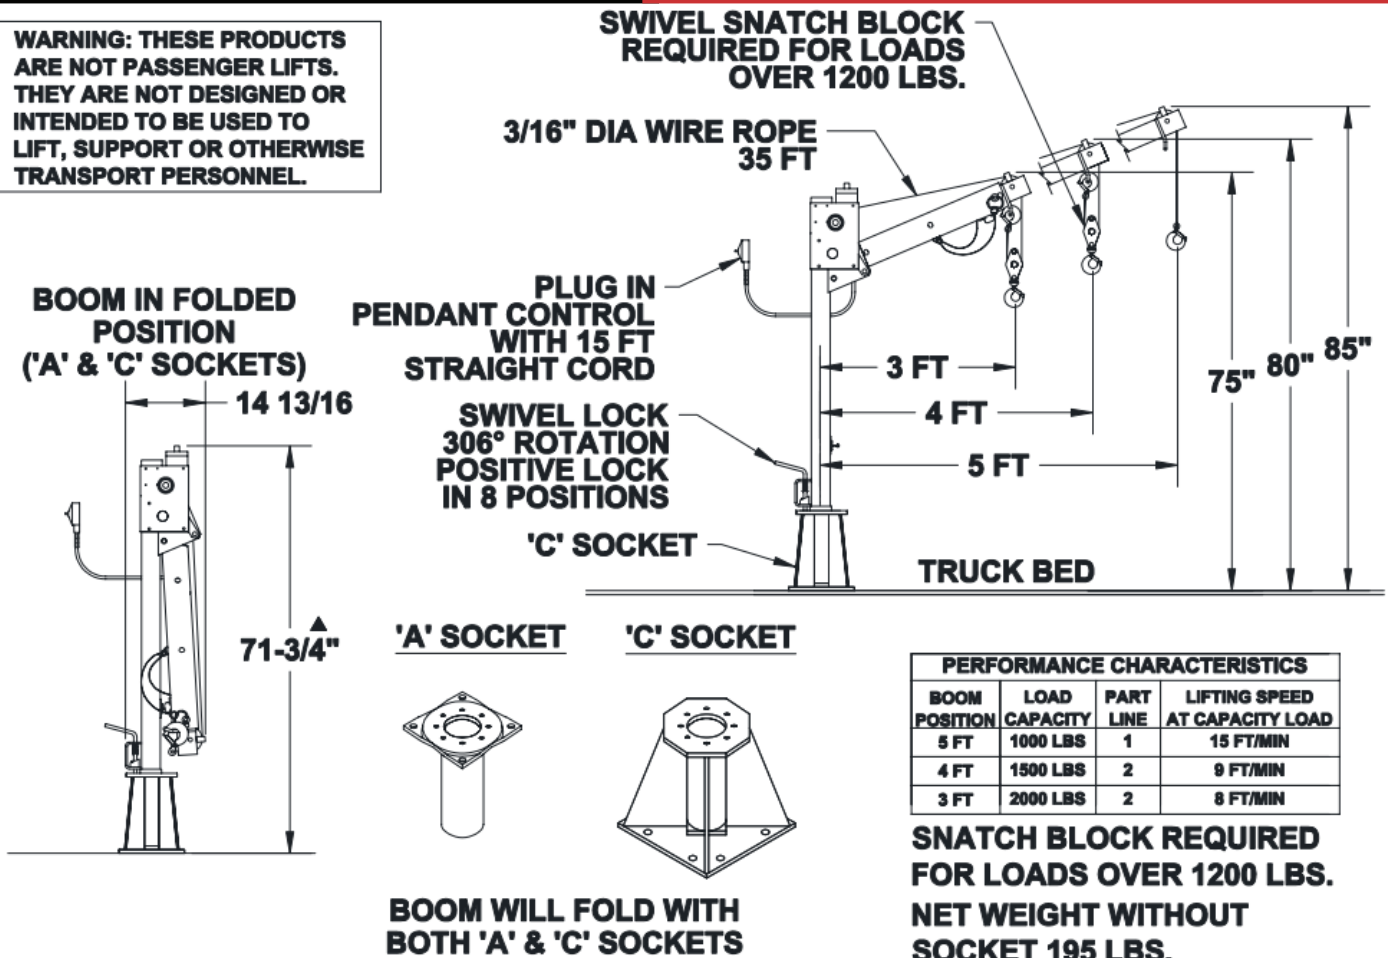


| PERFORMANCE CHARACTERISTICS |               |           |                                |
|-----------------------------|---------------|-----------|--------------------------------|
| BOOM POSITION               | LOAD CAPACITY | PART LINE | LIFTING SPEED AT CAPACITY LOAD |
| 5 FT                        | 1000 LBS      | 1         | 15 FT/MIN                      |
| 4 FT                        | 1500 LBS      | 2         | 9 FT/MIN                       |
| 3 FT                        | 2000 LBS      | 2         | 8 FT/MIN                       |

**SNATCH BLOCK REQUIRED FOR LOADS OVER 1200 LBS. NET WEIGHT WITHOUT SOCKET 195 LBS.**


## TYPE 'A' SOCKET (13171)

### RECESS MOUNTING

WEIGHT 18 LBS.

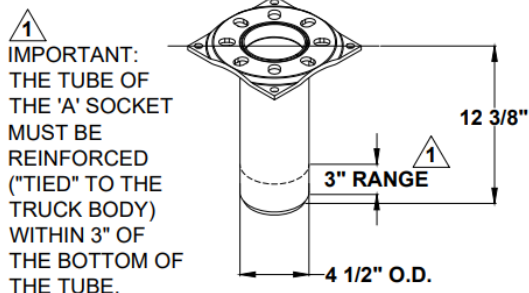


### MOUNTING DIMENSIONS

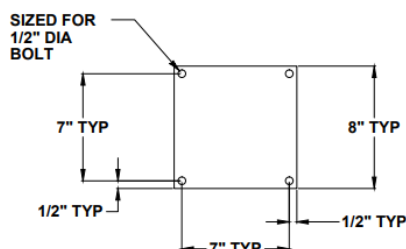


## TYPE 'C' SOCKET (13172)

### SURFACE MOUNTING

WEIGHT 36 LBS.

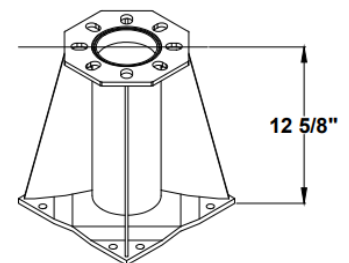


### MOUNTING DIMENSIONS

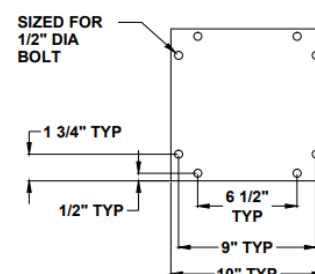



# CT2000 Series


**WARNING: THESE PRODUCTS ARE NOT PASSENGER LIFTS. THEY ARE NOT DESIGNED OR INTENDED TO BE USED TO LIFT, SUPPORT OR OTHERWISE TRANSPORT PERSONNEL.**

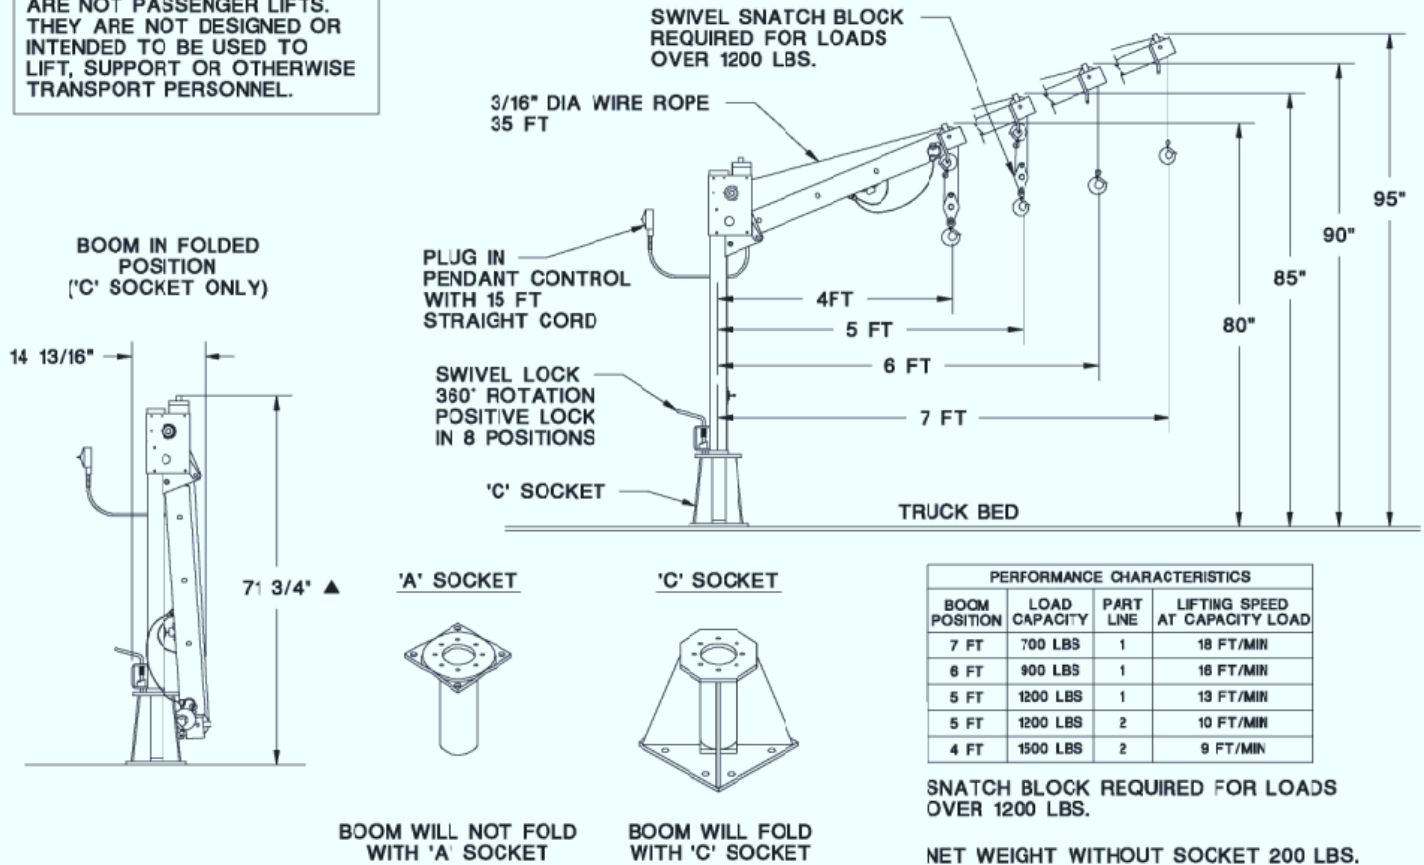


## TYPE 'A' SOCKET (13171)

### RECESS MOUNTING

WEIGHT 18 LBS.

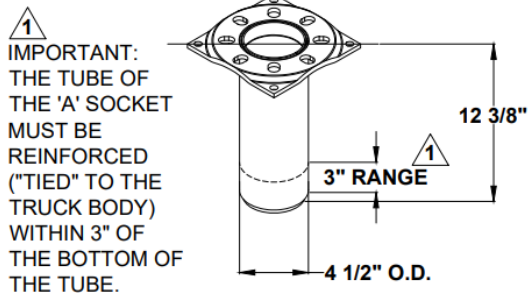


### MOUNTING DIMENSIONS

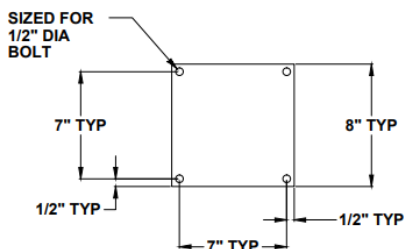

## TYPE 'C' SOCKET (13172)

### SURFACE MOUNTING

WEIGHT 36 LBS.

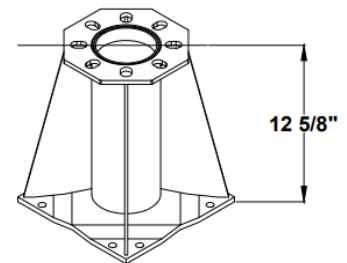

### MOUNTING DIMENSIONS

