



HT45KX (8K)



Capacity	8000 lbs
Crane Rating	45000 ft.lbs.
Boom Length(s)	20'
	25'
	30'
Min. GVWR	Class 5 - 19500 lbs
Controls	Hydraulic/VLC

Specifications

Capacity	8000 lbs
Crane Rating	45000 ft.lbs.
Boom Length(s)	10'5" - 16'9" - 20'9"
	11'11" - 18'8" - 25'2"
	13'6" - 22' - 30'2"
Stowed Boom Length	(20') 12'6"
	(25') 13'10"
	(30') 15'6"
Dimensions	34-1/16" H x 22-1/16" W
Base Plate	17-3/4" x 17-3/4"
Bolt Holes	14-3/8" x 14-3/8" (4x - Ø1-1/16")
Swing Radius	R19-5/8"
Wire Rope	120 ft. of 3/8"
Crane Weight	1900 lbs (20')
	1960 lbs (25')
	1990 lbs (30')

Hydraulic Fluid

Cold to Moderate	ISO Grade AW 46
Warm to Hot	ISO Grade AW 68

Hydraulic Hoses

Pressure	5/8" min.
Return	3/4" min.
Suction	1-1/4" min.

Requirements

Hydraulic Reservoir	25-gallon (Single-Stage)
	40-gallon (Tandem)

PTO PUMP	10-12 GPM @ 3000 psi
----------	----------------------

Rotation

Curbside CCW	20-degrees
Curbside CW	380-degrees

Standard Equipment

VLC Crane Control System

- Wireless-Remote, Pistol-Grip Controller
- Overload Protection Alerts
- LCD Display Screen Text
- Green/Yellow/Red under-boom alert lights

Counterbalance Valves

45 ft. CAN CORD for wireless remote

Optional Equipment

LED Boomtip Worklight

EZ Stow Handle

Custom Paint

25/40-gallon Hydraulic Reservoir

36" High Mounting Pedestal

Adjustable 18" - 26" Boom Rest

Front Manual Outriggers

Rear Manual or Hydraulic Outriggers




Venco Venturo Industries LLC
12110 Best Place | Cincinnati, Ohio 45241
800-226-2238 | 513-772-8448 Local
info@venturo.com | www.venturo.com


NOTE: All Venturo service cranes meet ANSI B30.5 and OSHA 1910.180 specifications. Specifications subject to change without notice.
Copyright © 2022 Venco Venturo Industries LLC. All Rights Reserved.




HT45KX (8K)

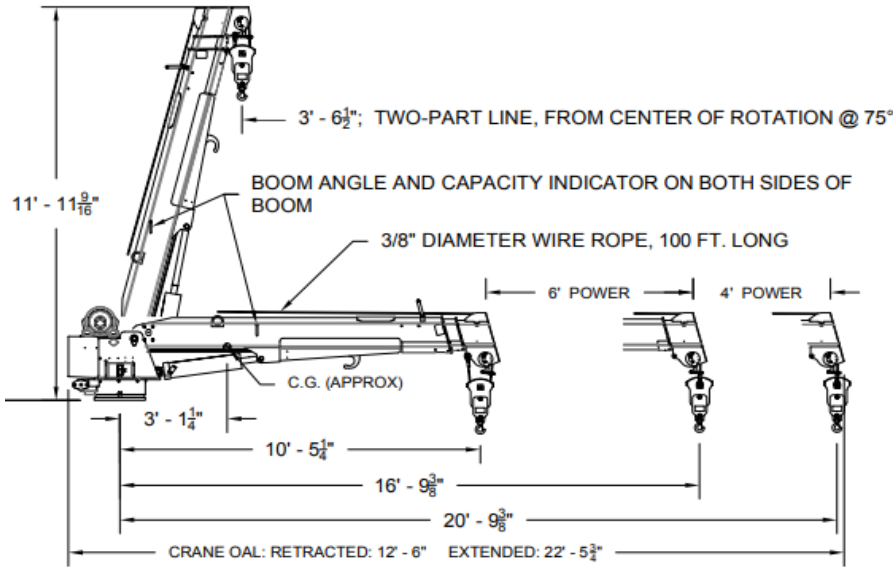

HT45KX-20

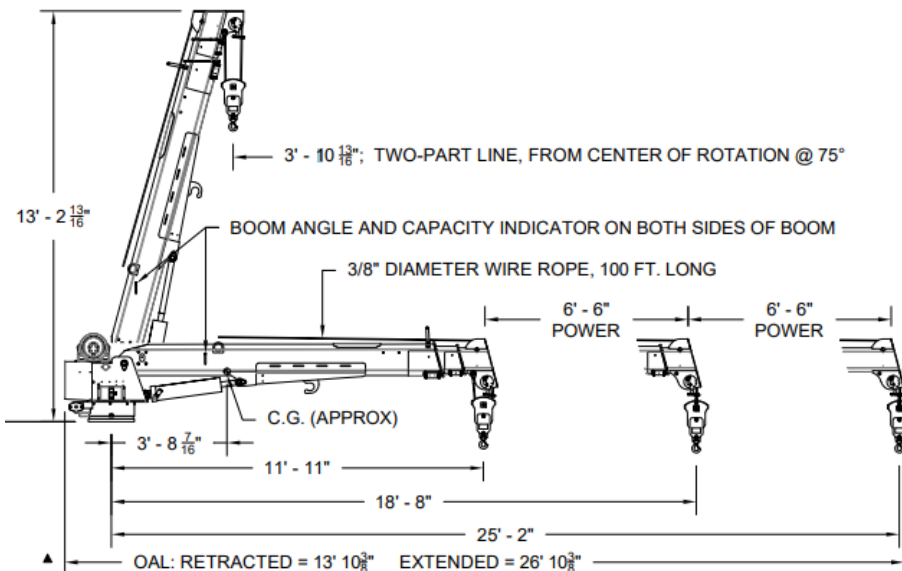


HT45KX-25

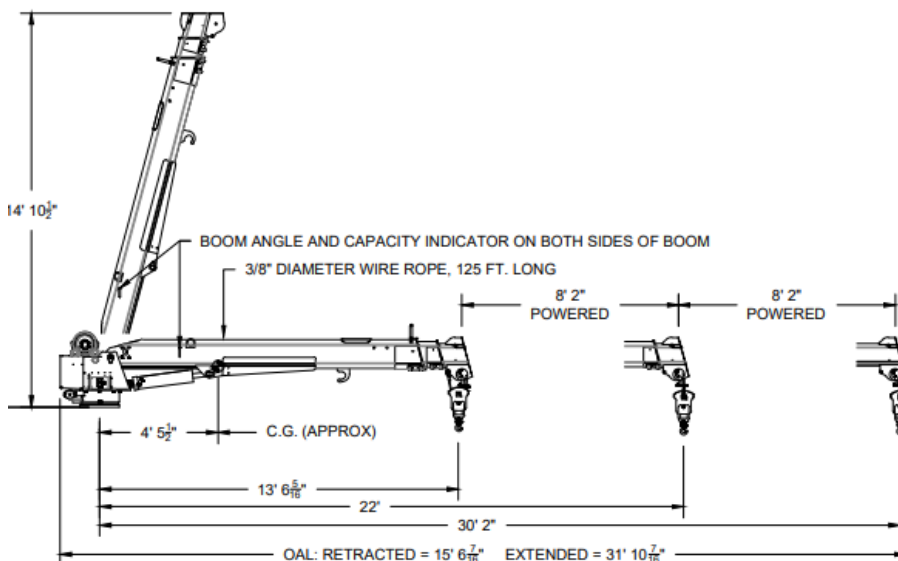


HT45KX-30




HT45KX (8K)

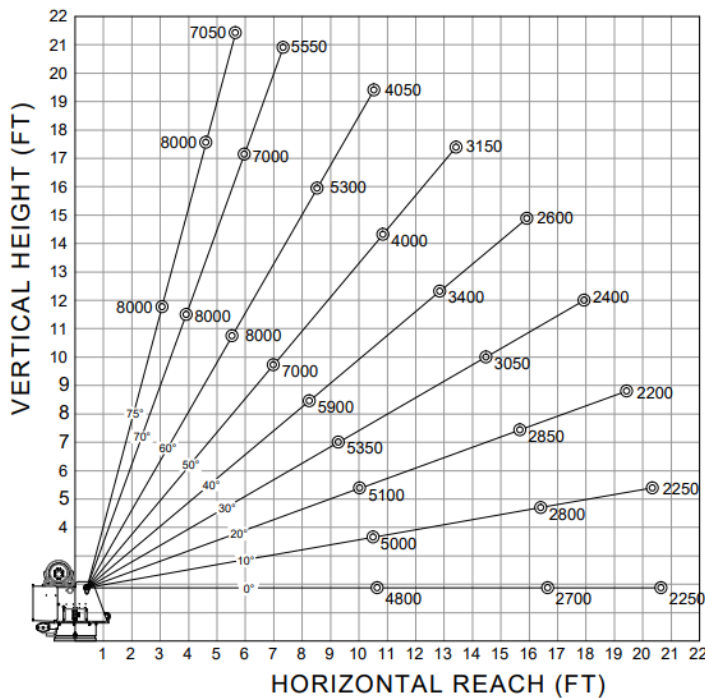

HT45KX-20

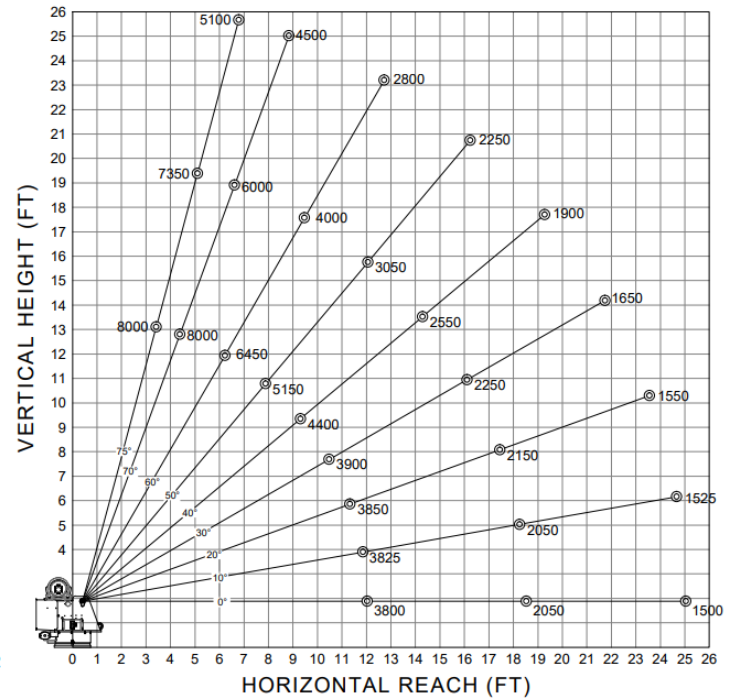

HT45KX-25

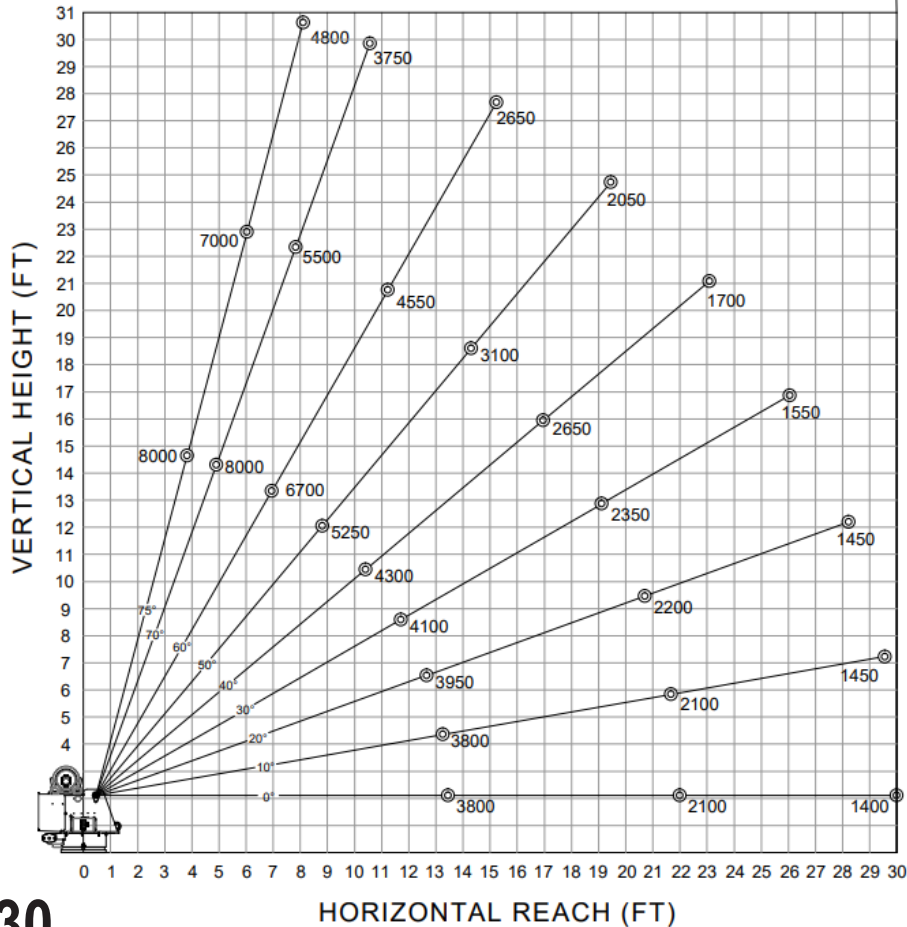

HT45KX-30