

## ELECTRIC - HYDRAULIC CRANES

### 3515E (ET12KX-15)



## SPECIFICATIONS

<b>Lifting Capacities:</b>	3,500 lbs
<b>Crane Rating:</b>	12,000 ft-lbs
<b>Mounting Space:</b>	14" x 14"
<b>Stowed Height:</b>	26-5/8"
<b>Rope Diameter:</b>	1/4" @ 65'
<b>Line Pull Speed</b>	25 ft/min (Single-line) 4 ft/min (Double-line)
<b>Max. Single-line:</b>	1,750 lbs
<b>Max. Double-line:</b>	3,500 lbs
<b>Rotation:</b>	360° Continuous
<b>Power Supply Requirements:</b>	Power Supply: Electric 12V DC Requirements: 12v DC Battery
<b>Hydraulic Req:</b>	Self-Contained w/ Power Unit
<b>Boom Elevation:</b>	-8° to +75°
<b>Controls:</b>	12V DC Non-Proportional
<b>Boom Extension:</b>	Power: 7' - 11' Manual: 11' - 15'
<b>Weight:</b>	700lbs
<b>Minimum Vehicle Class:</b>	Class 2 (8,800 lbs GVWR)
<b>Optional:</b>	- Corded - Corded & Wireless



The Venturo 3515E service crane is a versatile application that is neither too large or small for a majority of lifting jobs. This crane has been utilized heavily in municipal/public works lifting anything from service equipment to fire hydrants throughout the United States. With a 12,000 ft-lb crane rating and a 3,500 lb maximum capacity, the 3515E can be installed on trucks with a minimum 8,800 lbs GVWR.

## FEATURES

### ■ INDUSTRY LEADING IN ELECTRIC-HYDRAULIC CRANES

### ■ POWERFUL DC ELECTRIC WINCH

The ET series winches combine a powerful permanent magnet DC motor with robust sealing with proven 3-stage, all-metal gear train. Permanent grease lubrication means years of trouble-free service.

### ■ MANUAL CRANE OVERRIDE


Each ET series crane gives the user the ability to operate and stow the crane if there is power loss through the remote

### ■ POWERFUL HYDRAULIC SLEW DRIVE

Driven from high quality durable electric motor

### ■ COUNTER-BALANCE VALVE

Counterbalance valving in all cylinders for increase safety and protection during operation

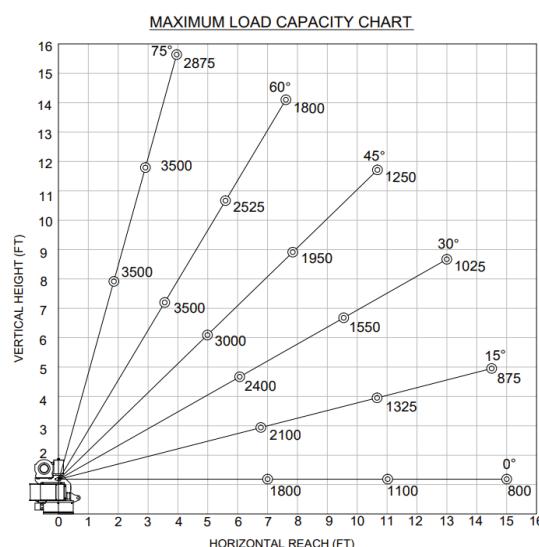

\*Venturo Body: VP16 Crane Service Body