

HYDRAULIC CRANES CT310KX




SPECIFICATIONS

Lifting Capacities:	1,900 lbs
Crane Rating:	6,650 ft-lbs
Mounting Space:	10-1/2" x 10-1/2"
Stowed Height:	67"
Rope Diameter:	3/16" @ 50'
Line pull speed:	30 ft/min (Single-line) 18 ft/min (Double-line)
Max. Single-line:	950 lbs
Max. Double-line:	1,900 lbs
Rotation:	360° Continuous



The Venturo CT310KX Electric Mast Crane is a four-function electric crane which features a heavy-duty planetary electric winch and a small footprint. The crane features an electric winch with hydraulic rotation, hydraulic elevation and hydraulic boom extension. The CT310KX also comes with optional proportional controls for all hydraulic functions to assist the operator in speeding up or slowing down the movements of the crane.

Power Supply Requirements:	Power Supply: Electric 12V DC Requirements: 12v DC Battery
Hydraulic Req:	No hydraulics
Boom Elevation:	-50° to +60°
Controls:	12V DC On/Off Winch (Option): 12V DC Proportional Hyd
Boom Extension 1:	Hydraulic 4'5" - 6'5"
Boom Extension 2:	Manual: 6'5" - 9'3"
Weight:	474lbs
Minimum Vehicle Class:	No minimum
Optional:	- Cored - Coreded & Wireless

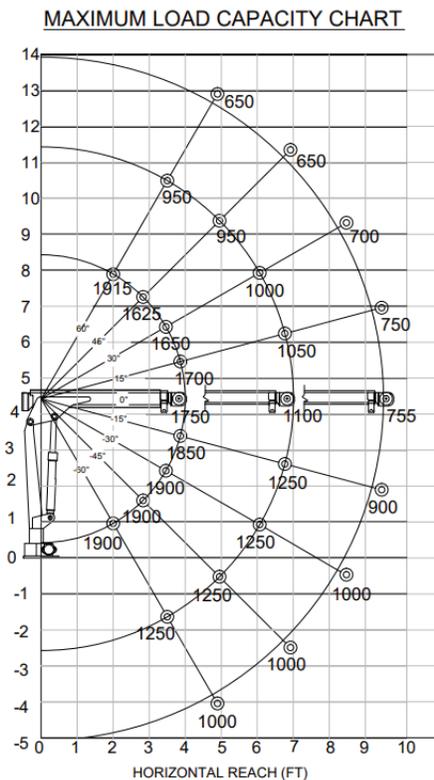

FEATURES

- FRICTIONLESS MANUAL ROTATION**
 Manual 360-degree rotation with a band brake provides unlimited, easy-to-use controlled load positioning.
- POWERFUL 12V DC ELECTRIC WINCH**
 ET Series winches combine a powerful permanent magnet DC motor with robust sealing and a proven 3-stage, all-metal gear train. Permanent grease lubrication provides years
- MULTI-CONFIGURATION OPTIONS**
 Custom cut-down of Mast height and multiple boom length options to fit a wide range of applications