



# HYDRAULIC CRANES HT25KX



MAX. CAPACITY  
5,000 LBS

CRANE RATING  
25,000 FT-LBS

MAX. REACH  
20 FT

MIN. GVWR  
10,500 LBS

CONTROLS  
VLC™

## FEATURES

- **FULL-HYDRAULIC EXTENSION**  
The standard boom length for the HT25KX is 20'.
- **NEW AUTO ADJUST ANTI-TWO BLOCK**  
Innovative, rugged and compact anti-two block design automatically adjusts to boom angle. Minimizes hook-to-boom tip height and is less prone to damage.
- **NEW BOOM TIP WORKLIGHT**  
Optional worklight that automatically adjusts to the boom angle so you can follow your load.


## 5,000 LB CAPACITY AT 5 FT

The Venturo HT25KX with VLC™ controls features a maximum capacity of 5,000 lb. **Venturo's new Electronic Crane Control Management System** provides added safety and benefits for crane operators. Benefits include a standard, wireless, pistolgrip controller, overload protection which controls and prevents any type of overload, LCD Display Screen alerts, transmitter handle vibrations, green/yellow/red alert lights under boom, and corresponding lights on the receiver. The LCD display shows percentage of load, boom angle in degrees and percentage of total capacity during crane operation. The VLC™ system also provides vehicle stability and grade control.

## SPECIFICATIONS

<b>Lifting Capacities:</b>	5,000 lbs
<b>Crane Rating:</b>	25,000 ft-lbs
<b>Mounting Space:</b>	16" x 16"
<b>Stowed Height:</b>	30-5/8"
<b>Rope Diameter:</b>	5/16" @ 80'
<b>Line pull speed:</b>	22 ft/min @ 5 GPM (Single) 11 ft/min @ 5 GPM (Double)
<b>Max. Single-line:</b>	2,500 lbs
<b>Max. Double-line:</b>	5,000 lbs
<b>Rotation:</b>	400°
<b>Power Supply:</b>	PTO & Pump Required
<b>Requirements:</b>	5 gpm @ 3,000 psi
<b>Hydraulic Req:</b>	10 gal. reservoir
<b>Boom Elevation:</b>	-8° to +75°
<b>Controls:</b>	VLC™ (Venturo Logic Controls) Standard Wireless Remote
<b>Boom Extension:</b>	10' - 16' - 20' Full Hydraulic
<b>Hydraulic Req:</b>	5 GPM with 10 gal. reservoir
<b>Minimum Vehicle Class:</b>	Class 3 (11,000 lbs GVWR)

## MAXIMUM LOAD CAPACITY CHART

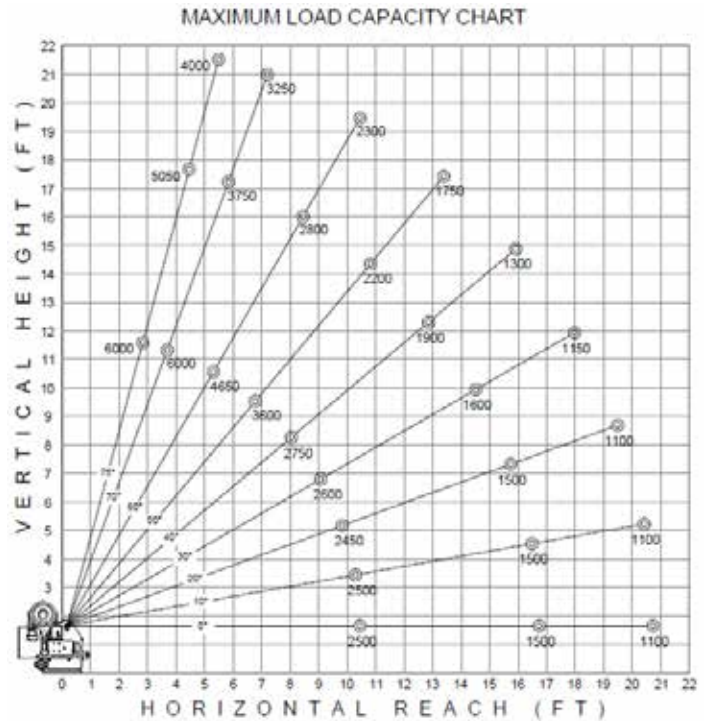

## VLC™ SYSTEM CONTROLS



### Multiple Safety and Capacity Alerts

Green/Yellow/Red alert light located on the underside of the boom.

### Overload/Stability Safety

The VLC system controls and prevents any type of overload on the crane and also provides stability and grade control.



### Wireless Remote

The wireless remote, pistol-grip controller is a standard feature as part of the VLC™ system for ALL proportionally-controlled hydraulic Venturo service cranes.

