



MAX. CAPACITY
1,000 LBS

CRANE RATING
3,000 FT-LBS

MAX. REACH
3 FT

APPLICATIONS
MULTIPLE

CONTROLS
ELECTRIC

FEATURES

■ COMPACT STORAGE

The ESV1000 allows owners the cargo space while including a lifting application in their enclosed body or work van. The crane utilizes very little space allowing owners to include shelving units and other van accessories.

■ UNIVERSAL PLACEMENT

The ESV1000 can be installed and/or placed in many different types of applications including enclosed service vans, cargo vans, flatbeds, pickup beds and many more.

A NEW KIND OF LIFTING SOLUTION.

The ESV1000 now offers you a lifting solution for the jobsite with your enclosed service body. With an extremely small footprint, the crane can stow nicely against the inside wall on either the curb-side or street-side of the service body when not in use. With the telescopic boom, the ESV1000 can fit in any of the enclosed service bodies without the need for any add-ons or specialty mounting kits. The 12V DC winch wires directly to the battery and includes a 12 ft pendant controller with up/down functions. The winch is situated in a fixed housing to the side of the crane. This will allow the boom to swing with zero winch interference, giving the crane a wide swing radius.

SPECIFICATIONS

Lifting Capacities:	1,000 lbs
Crane Rating:	3,000 ft-lbs
Mounting Space:	10" x 10" Floor-mount
Stowed Height:	37-5/8"
Rope Diameter:	3/16" @ 25'
Line pull speed:	14 ft/min
Max. Single-line:	1,000 lbs
Boom Extension:	Up to 3'
Rotation:	Manual with Band Brake
Power Supply:	Electric 12V DC
Requirements:	12v DC Battery
Circuit Breaker:	150 AMP Recommended
Boom Elevation:	5-pin Boom Elevation
Controls:	12V DC On/Off Winch



OPTIONS & ACCESSORIES

Master Disconnect Switch


Crane includes a master disconnect switch kit which allows the user to disconnect the power to the crane during transit and when not in use.




ESV1000 DIMENSIONS



BOTTOM

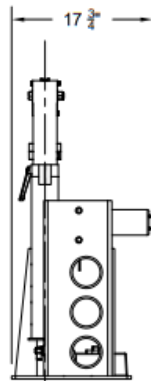

RIGHT

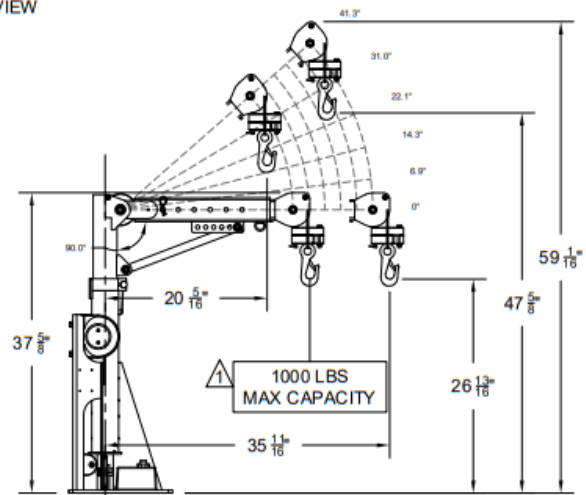

FRONT



Venco Venturo Industries LLC
 12110 Best Place | Cincinnati, Ohio 45241
 800-226-2238 | 513-772-8448 Local
 info@venturo.com | www.venturo.com

NOTE: All Venturo service cranes meet ANSI B30.5 and OSHA 1910.180 specifications. Specifications subject to change without notice. Copyright © 2019 Venco Venturo Industries LLC. All Rights Reserved.